




HAND RAILING

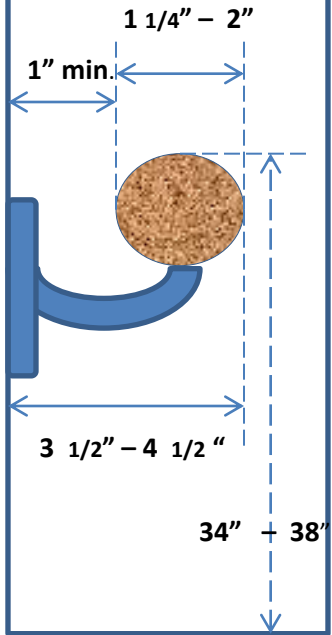

STEP PROFILE

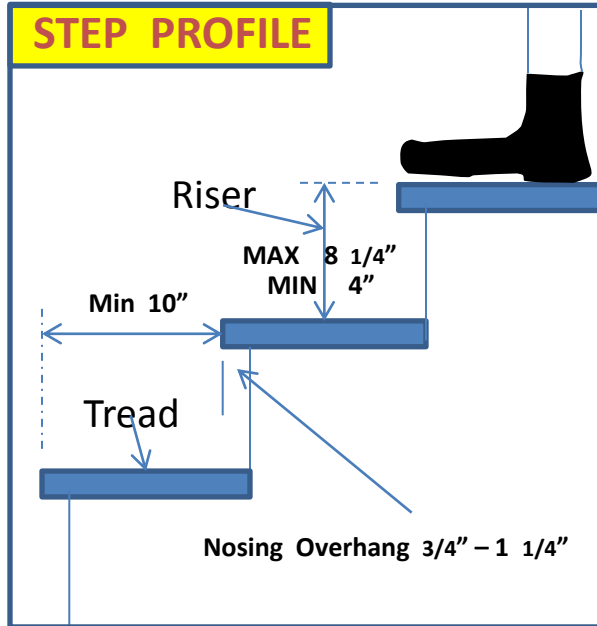


ELEVATION PROFILE

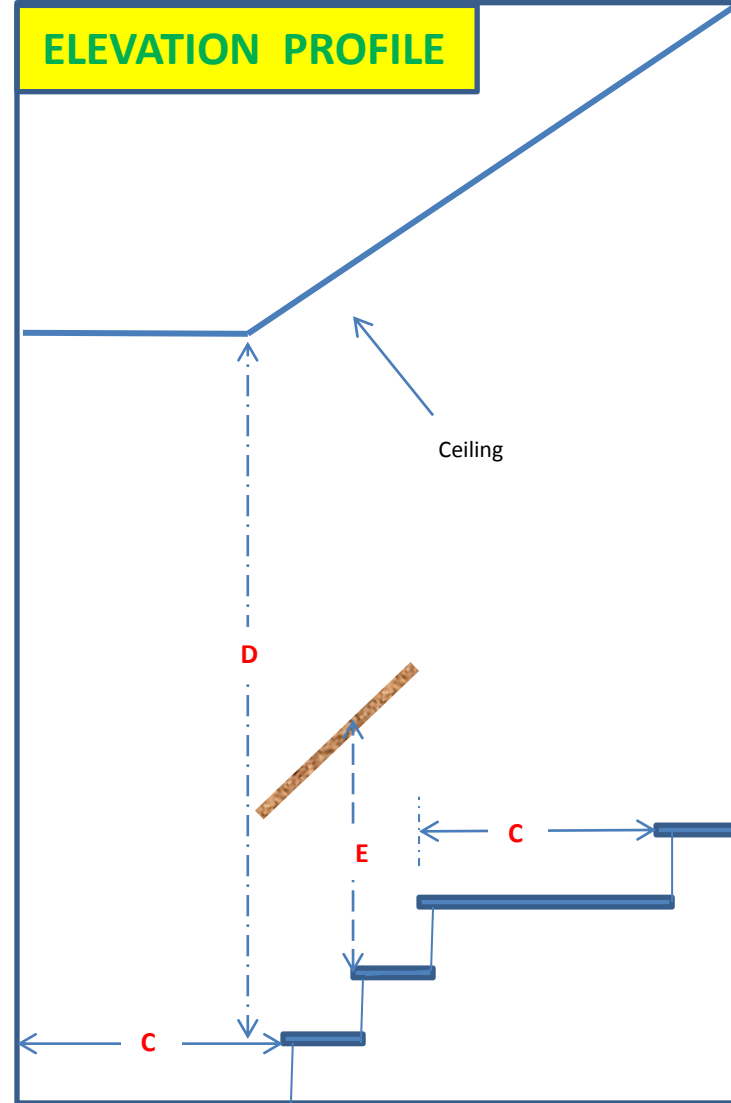

- Maximum difference in all risers is $3/8''$
- Maximum difference in all treads is $3/8''$
- No nosing required, $11''$ or greater treads.

- Graspable rail required, 4 or more risers
- Ends of railing to return to wall.

FLOOR PLAN

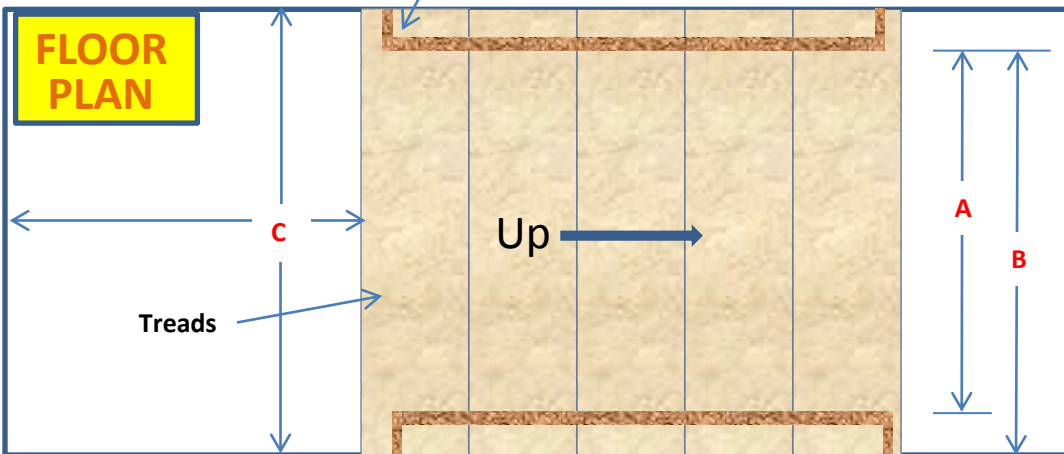

- A = Minimum width between 2 railings is $27''$
- B = Minimum width between 1 railing and wall is $31\frac{1}{2}''$
- C = Minimum width of stairs and landing clearance is $36''$
- D = Minimum headroom clearance is $80''$
- E = Height of hand railing, $34''$ to $38''$

Arnone Building & Remodeling Inc.

44 Virginia Rail Drive , Bethany , Ct. 06524

Established 1973

Home Improvement License # 0550463

E-mail ArnoneBuilding@aol.com

Website ArnoneBuilding.com



Thank you for visiting and hope the information was helpful in your research.

Should you be in need of a home improvement contactor please view my website to learn an epic of information to properly guide you on how to expose dishonest , fraudulent , misleading and unqualified contractors by learning how to divulge their array of tactics , schemes , tricks , deceptions and expose their deficiencies in order to dismiss them and select the ideal contractor with rewards of an successful and enjoyable outcome.

My website has been voted numerous times by the Better Business Bureau as thy best in the State in “Educating the Consumer” regarding the Home Improvement Industry.

Thank you , John Arnone